

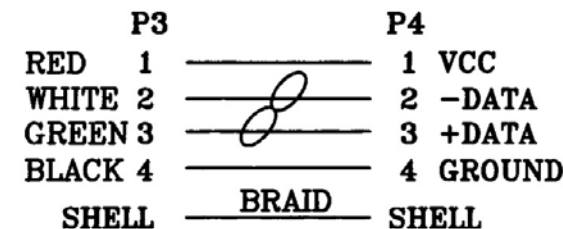


LTR	REV.	DESCRIPTION	DATE

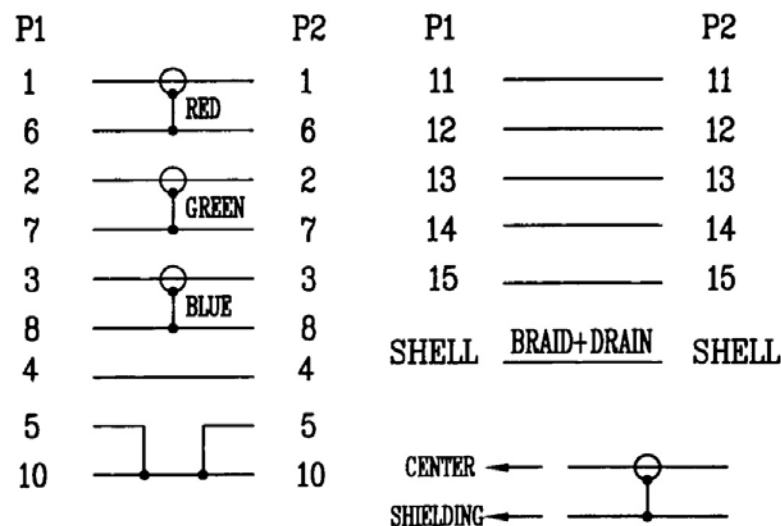

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

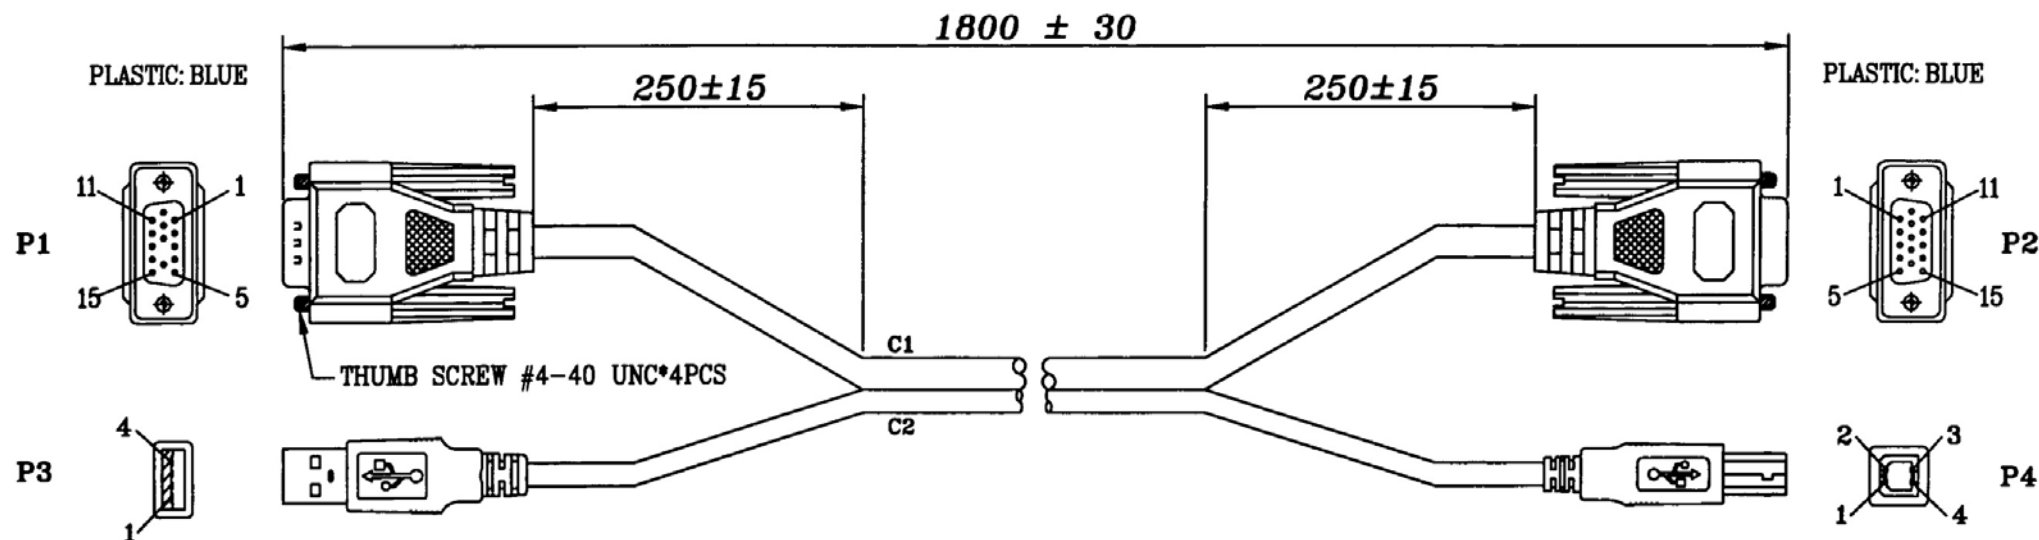

KVM Cable Set USB

LTR	REV.	DESCRIPTION	DATE

NOTES:

1.CABLE: C1*C2: 8.5*4.7±0.2mm

(C1) UL2919 28AWG(7/0.127)T.C*3COAX+24AWG(7/0.203)T.C*7C
+AL-FOIL/MYLAR+DRAIN WIRE+BRAID SHIELD 85% TINNED COPPER
PVC JACKET OD:ø8.5±0.2mm COLOR:BLACK(NK-K01)

(C2) UL-2725 [28AWG(7/0.127)*1PR+24AWG(7/0.203)*2C
+AL-FOIL/MYLAR+DRAIN WIRE(7/0.127)+65% BRAID]TIN
PVC JACKET OD:ø4.7±0.15mm COLOR:BLACK(NK-K01)

2.CONNECTER:

P1:HDB15P MALE GOLD FLASH CONTACT,
NICKEL PLATED SHELL (THE 9TH PIN UNLOAD)

P2:HDB15P FEMALE GOLD FLASH CONTACT,
NICKEL PLATED SHELL

P3:USB A TYPE MALE GOLD FLASH CONTACT,
NICKEL PLATED SHELL

P4:USB B TYPE MALE GOLD FLASH CONTACT,
NICKEL PLATED SHELL

3.SHIELD: P1&P2 COPPER FOIL 360° SOLDERED TO
CONNECTOR SHELL & CABLE BRAID

4.HOOD: P1&P2: MOLDED TYPE, PVC 45P, COLOR:BLUE(PANTONE 661C)
P3&P4: MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)

5.ELECTRICLE TEST:

<1>100% OPEN SHORT & MIS WIRE TEST.

<2>CONTACT RESISTANCE 3 Ohms MAX.

<3>INSULATION RESISTANCE 20M Ohms MIN.

6.PACKING: EACH PC / E'quip ZIP BAG + BAR CODE LABEL

Tolerance Inch M/M		
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05



KVM Cable Set USB

KVM: HDB15F+USB/B-M

PC: HDB15M+USB/A-M